



PAVika

silent heavy-duty barrier

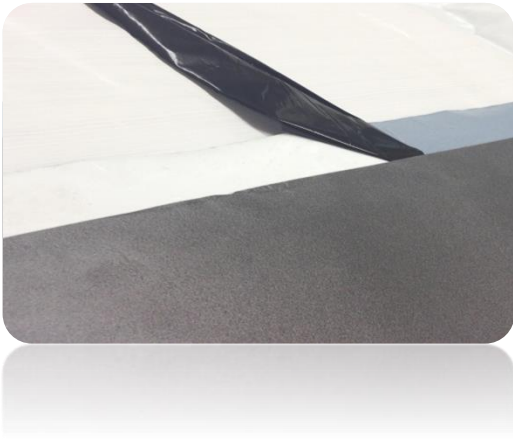


Your benefits

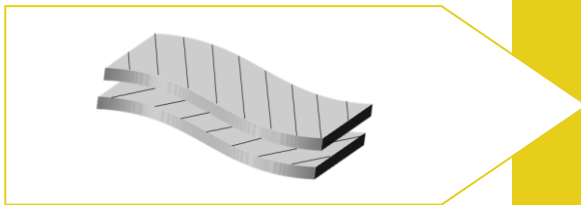

- ✓ **cross laminated film**
highly resistant and robust



- ✓ **self-adhesive strip**
simple and clean laying

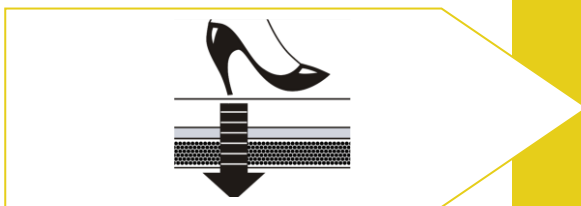

- ✓ **crosslinked PE-foam**
sound absorption improvement of up to 16 dB



- ✓ **S_D-value > 1'500 m**
vapour proof



- ✓ **51.5 m² per reel but just 14 kg**
low transport and storage costs

PAVAG PAVika – Product Specifications

Properties	Method	PAVAG PAVika	Unit	Tolerance
Basis weight		255	gr / m ²	+/- 10 %
Length		50	m	+/- 10 %
Width		1,03	m	+/- 10 %
Reel weight		14	kg	+/- 10 %
Water vapour permeability SD-value	DIN EN 1931	> 1500	m	
Tensile strength (MD / CD)	EN ISO 527 – 3	60 / 60	N / 15 mm	+/- 10 %
Elongation at break (MD / CD)	EN ISO 527 – 3	>100* / 100*	%	+/- 10 %
Tear Resistance (MD / CD)	EN ISO 53363	60 / 60	N	+/- 10 %

*The values describe the elongation behaviour of the whole film composite, the incorporated layer has a clearly lower elongation at break.
The information contained in this document is provided in good faith. Pavag Folien AG accepts no liability for misuse of products or information.