


## Rolamit® Robust and flexible

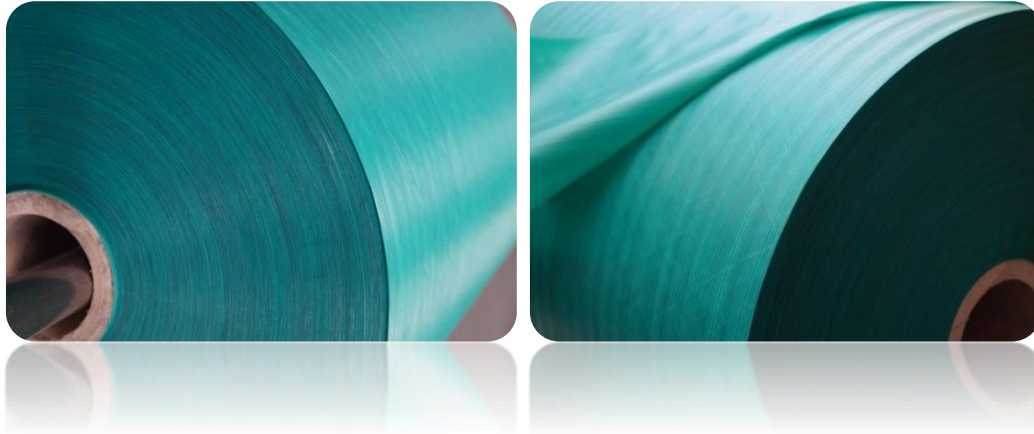

### Your benefits

- ✓ **Robust and flexible**  
no tears around edges
- ✓ **Slip resistant due to the ridged surface structure**  
easy to wrap and ideal for transportational use
- ✓ **Resistant to many oils and chemicals**  
all goods are safely protected

### Product Specifications

Properties	Method	Rolamit® 70	Rolamit® 150	Unit	Tolerance
Basis weight		70	150	g/m <sup>2</sup>	+/-10%
Tensile Strength MD / CD	EN ISO 527-3	60 / 70	105 / 85	N/15mm	+/-10%
Elongation at break MD / CD	EN ISO 527-3	550 / 400	850 / 600	%	+/-10%
Tear Resistance MD / CD	EN ISO 53363	45 / 35	60 / 50	N	+/-10%

### General Information

Reel width	220 mm to 1,500 mm
Reel length	100 m to 4,000 m