


## PAVALix

### High strength and elongation

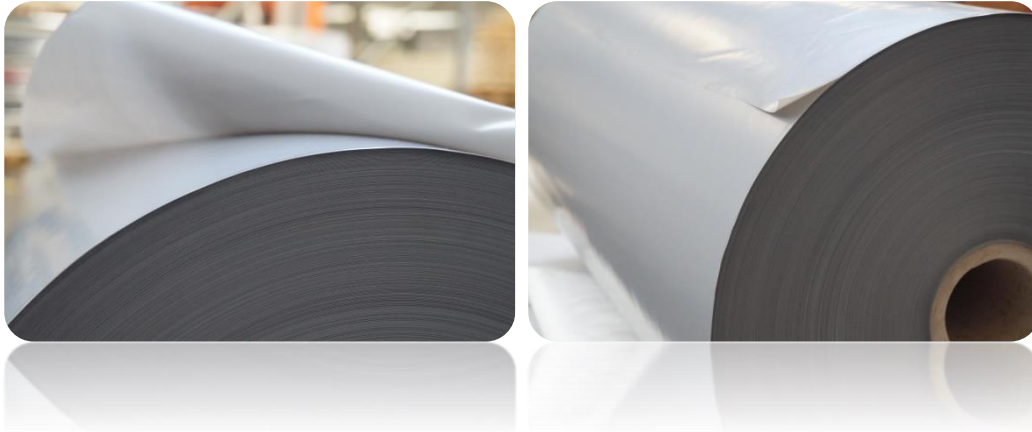

### Your benefits

- ✓ **High strength film with a smooth surface**  
ideal as carrier membrane
- ✓ **Low curling**  
suitable for adhesive bondings
- ✓ **High levels of dimensional stability**  
developed to be perfectly suited for coating

### Product Specifications

Properties	Method	PAVALix			Unit	Tolerance
Thickness		75	100	125	µm	+/-10%
Tensile Strength*	EN ISO 527-3	>65 >200	>80 >250	>95 >300	N/15mm N/50mm	- (calculated)
Elongation at break*	EN ISO 527-3	>700	>700	>700	%	
Tear Resistance*	EN ISO 53363 ISO 34-B	40 22	50 27	60 32	N	+/-10%
Tear Resistance* (nail)	EN 12310-1	75	105	135	N	+/-10%

\*MD/CD

### General Information

Reel width	220 mm to 1,100 mm
Reel length	100 m to 5,000 m

V 18/282